

# Hoffman Slim-Line Laundry Press

***The new revolutionary design laundry press.***

**INNOVATIVE FEATURES:**

- Compact frame – minimal floor space
- Extremely quiet and smooth operation
- Novel, quick-disconnect pneumatic circuit module for ease of maintenance
- Energy efficient insulated head cover and steam hoses reduce utility costs and provides cooler working environment
- Ergonomic soft touch operating buttons and foot pedals for operator comfort
- Extra wide head opening provides easy access to and unrestricted view of the garment
- Heavy-duty steel frame and linkage for exceptional durability
- Separate closing and pressure cylinders for fast operation and wide pressure range
- Snag-free stainless steel table

**AVAILABLE OPTIONS:**

- Digital release timer
- Steam/electric iron and lowboy
- All-steam iron
- Water spray gun and condenser
- ASME certification
- CE certification
- Left hand head and buck mounting




**SLALU-51**




  
**HOFFMAN**  
*The First Name In Pressing*

**TECHNICAL DATA:**

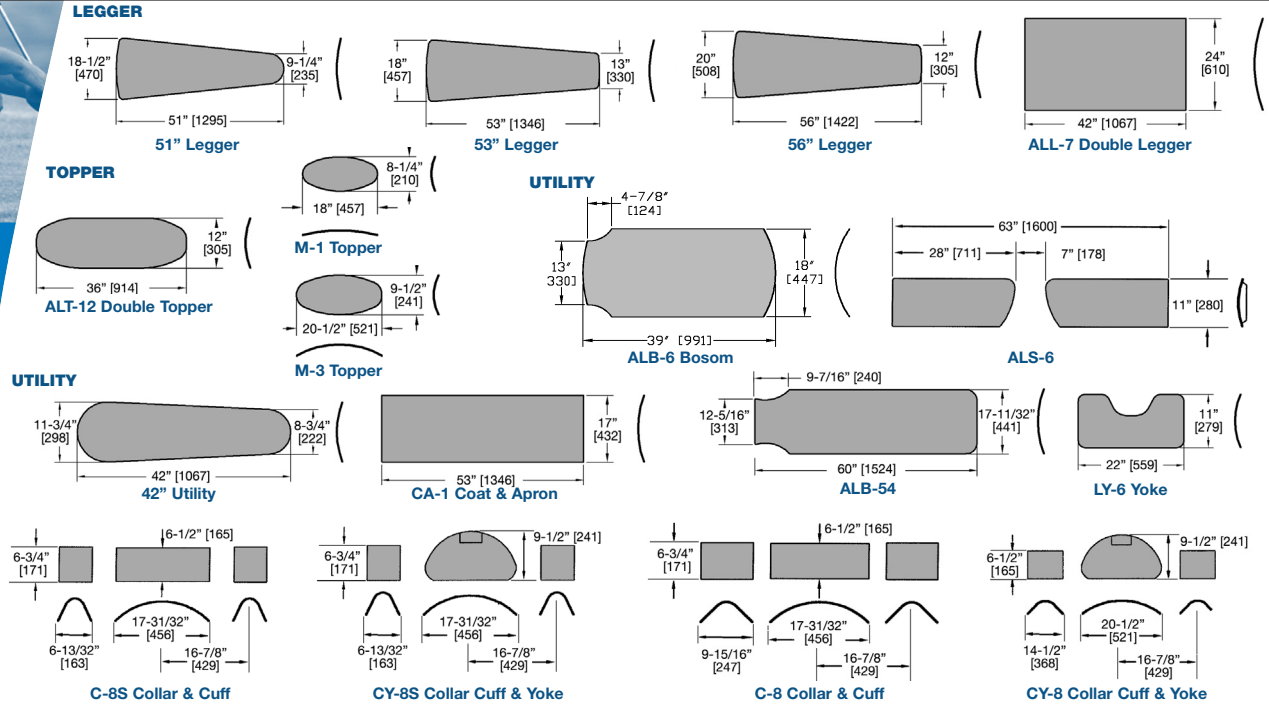

**TECHNICAL SPECIFICATIONS:**

- A** 47-5/16" [1202]
- B** 42" [1067]
- C** Dimension "C"  
(see table)

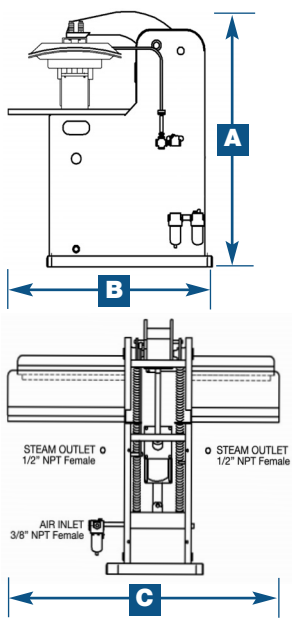

	SLALM19 (M1)	SLALM21 (M3)	SLALY 6	SLALT 12	SLALB 54	SLALCA 1
<b>Steam Consump. @ 80 psig</b>	34 lb/hr [15.4 kg/hr]	34 lb/hr [15.4 kg/hr]	36 lb/hr [16 kg/hr]	42 lb/hr [19 kg/hr]	64 lb/hr [27 kg/hr]	60 lb/hr [29 kg/hr]
<b>Max. Steam Press.</b>	125 psi [862 KPa]	125 psi [862 KPa]	125 psi [862 KPa]	125 psi [862 KPa]	125 psi [862 KPa]	125 psi [862 KPa]
<b>Air Consumption Free Air per Cycle @ 80 psi</b>	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]
<b>Max. Air Press.</b>	80 psi [552 KPa]	80 psi [552 KPa]	80 psi [552 KPa]	80 psi [552 KPa]	80 psi [552 KPa]	80 psi [552 KPa]
<b>Table Length Dimension "C"</b>	21 in [533 mm]	21 in [533 mm]	36 in [914 mm]	36 in [914 mm]	60 in [1524 mm]	56 in [1422 mm]
<b>Net Machine Wt.</b>	740 lb [335 kg]	745 lb [337 kg]	775 lb [352 kg]	780 lb [353 kg]	1495 lb [680 kg]	950 lb [430 kg]
<b>Shipping Wt.</b>	803 lb [365 kg]	808 lb [367 kg]	833 lb [378 kg]	842 lb [383 kg]	1555 lb [707 kg]	1005 lb [457 kg]
	SLALL 7	SLALU 38	SLALU 42	SLALU 51	SLALU 53	SLALU 56
<b>Steam Consump. @ 80 psig</b>	68 lb/hr [31 kg/hr]	30 lb/hr [13.6 kg/hr]	30 lb/hr [13.6 kg/hr]	42 lb/hr [15.4 kg/hr]	42 lb/hr [15.4 kg/hr]	42 lb/hr [15.4 kg/hr]
<b>Max. Steam Press.</b>	125 psi [862 KPa]	125 psi [862 KPa]	125 psi [862 KPa]	125 psi [862 KPa]	125 psi [862 KPa]	125 psi [862 KPa]
<b>Air Consumption Free Air per Cycle @ 80 psi</b>	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]
<b>Max. Air Press.</b>	80 psi [552 KPa]	80 psi [552 KPa]	80 psi [552 KPa]	80 psi [552 KPa]	80 psi [552 KPa]	80 psi [552 KPa]
<b>Table Length - Dimension "C"</b>	45 in [1143 mm]	51 in [1295 mm]	51 in [1295 mm]	56 in [1422 mm]	56 in [1422 mm]	56 in [1422 mm]
<b>Net Machine Wt.</b>	1110 lb [502 kg]	800 lb [364 kg]	820 lb [372 kg]	902 lb [410 kg]	920 lb [418 kg]	945 lb [429 kg]
<b>Shipping Wt.</b>	1175 lb [534 kg]	850 lb [387 kg]	870 lb [395 kg]	975 lb [443 kg]	985 lb [448 kg]	1000 lb [455 kg]
	SLALS 6	SLALB 6	SLALC 8	SLALC 8S	SLALCY 8	SLALCY 8S
<b>Steam Consump. @ 80 psig</b>	45 lb/hr [20.4 kg/hr]	42 lb/hr [19 kg/hr]	34 lb/hr [15.4 kg/hr]	34 lb/hr [15.4 kg/hr]	34 lb/hr [15.4 kg/hr]	34 lb/hr [15.4 kg/hr]
<b>Max. Steam Press.</b>	125 psi [862 KPa]	125 psi [862 KPa]	125 psi [862 KPa]	125 psi [862 KPa]	125 psi [862 KPa]	125 psi [862 KPa]
<b>Air Consumption Free Air per Cycle @ 80 psi</b>	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]	1.04 ft <sup>3</sup> [0.03 M <sup>3</sup> ]
<b>Max. Air Press.</b>	80 psi [552 KPa]	80 psi [552 KPa]	80 psi [552 KPa]	80 psi [552 KPa]	80 psi [552 KPa]	80 psi [552 KPa]
<b>Table Length - Dimension "C"</b>	63 in [1600 mm]	42 in [1067 mm]	48 in [1219 mm]	48 in [1219 mm]	48 in [1219 mm]	48 in [1219 mm]
<b>Net Machine Wt.</b>	1011 lb [459 kg]	780 lb [354 kg]	770 lb [348 kg]	770 lb [348 kg]	770 lb [348 kg]	770 lb [348 kg]
<b>Shipping Wt.</b>	1211 lb [549 kg]	830 lb [376 kg]	820 lb [371 kg]	820 lb [371 kg]	820 lb [371 kg]	820 lb [371 kg]



**Hoffman/New Yorker, Inc.**  
 46 Clinton Place, Hackensack, NJ 07601  
 Tel: 201 488-1800 Fax: 201 488-4480  
 www.hoffman-newyorker.com

**DISTRIBUTED BY:**

Equipment is subject to manufacturer's standard warranty. Accuracy of illustration and description of equipment shown herein applies to product as manufactured at time of publication.

© Copyright 2014. Hoffman/New Yorker, Inc. All rights reserved. Printed in U.S.A.