ENCORE



Loaded with powerful features

Strength, durability, and performance are at the core of the newly refined Encore by Wascomat stacked dryer. Built with professional grade components and loaded with powerful features, Encore combines innovative technology, energy efficiency, and proven Wascomat reliability for optimal results every time.

Encore Stacked Dryer Key Features

- Commercial grade construction
- Extra large load drum 22+ pound capacity per pocket
- 7.7 cu. ft. drum
- Drum supported by five roller bearings for long life
- Fast drying
- Axial airflow ensures the shortest drying time

- Easy to clean, heavy duty lint screen
- Extra large door opening for easy loading and unloading
- Large capacity can handle oversized loads with ease
- Coin and card payment compatibility
- Space-saving design
- · Easy to install


Available in Electric. Gas coming soon.



Encore Stacked Dryer Specifications at a Glance

Dry Capacity (Per Pocket)	22 lb / 10 kg
Cylinder Volume (Per Pocket)	7.7 cu ft / 218 liters
Overall Height	85 3/8 in (216.86 cm)
Height of Upper Dryer	42 1/2 in (107.96 cm)
Overall Width	27 in (68.64 cm)
Overall Depth	31 in (78.91 cm)
Depth w/ Doors Open 90°	51 1/2 in (130.81 cm)

Specifications subject to change without notice.

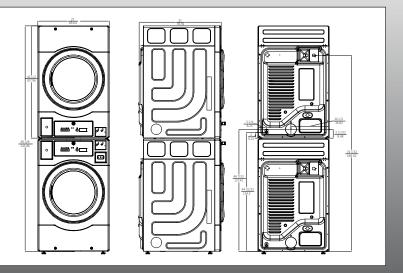

Encore by Wascomat Stacked Dryer Specifications	
Motor	1/3 HP
Electrical Rating (Gas Model)	120 V/60 Hz / 1-phase
Electrical Rating (Electric Model)	120 V/240/60 Hz/1-phase or 120 V/208/60 Hz/1-phase
Breaker Fuse Requirements (Gas Heat)	15A
Breaker Fuse Requirements (Electric Heat)	30A
Cylinder Volume	7.7 cu ft (218 liters)
Cylinder Diameter	26 in (660 mm)
Cylinder Depth	20.8 in (528 mm)
Capacity (Dry Weight)	22 lbs (10 kg) Per Pocket
Airflow	192 cfm Per Pocket
Gas Heating	19,000 BTU/hr Per Pocket
Electric Heating	5.0 kW Per Pocket
Gas Connection	3/8 in MNPT
Tumbling Speed	50 rpm
Exhaust Connection	4 in diameter
Approx. Net Weight	158.7 lbs (72 kg)
Approx. Shipping Weight	176 lbs (80 kg)
Product Dimensions	
Overall Height	85 3/8 in (216.86 cm)
Overall Width	27 in (68.64 cm)
Overall Depth	31 in (78.91 cm)
Depth w/ Doors Open 90°	51 1/2 in (130.81 cm)

Refer installation and servicing to qualified, licensed personnel. Always read Installation and Operating Manuals and consult local codes before installation. Protect machines with properly rated circuit breakers ONLY. Warranty void if not properly installed.

Specifications subject to change without notice. Laundrylux assumes no responsibility for errors or omissions in this information.

Money boxes sold separately.



Axial Airflow

The highly efficient axial airflow system and tight construction results in extremely low energy usage and faster dry times.




Roller Supported Tumbler

Innovative support rollers improve drum stability, ensure quiet operation, and extend the life of the machine.



Time-of-Day Promo Pricing

Encore dryers are easily programmable with promotional vend pricing at specified times and days. Multiple promotion events can be programmed at one time using the built-in real time clock.

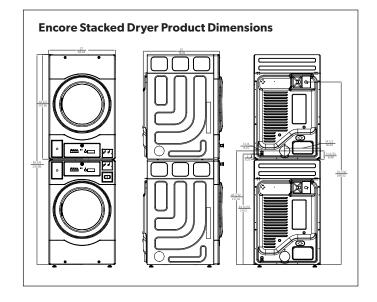

Laundrylux 800.645.2204 · laundrylux.com

Laundrylux • 461 Doughty Blvd., Inwood, NY 11096-0338

Sales & Administration: 516-371-4400 • F 516-371-4204 • sales@laundrylux.com **Parts:** 516-371-2000 • F 516-371-4029 • parts@laundrylux.com **Tech Support:** 516-371-0700 • F 516-371-4029 • service@laundrylux.com

En Mexico: Llame gratis a este numero 001-800-010-1010

